Three-Phase Asynchronous Motor Starter

This motor starter is designed for direct starting and stopping of three-phase asynchronous motors. It is suitable for AC 50Hz voltage 500V and below, with a capacity of up to 7.5KW, and can be used for forward or reverse operation.

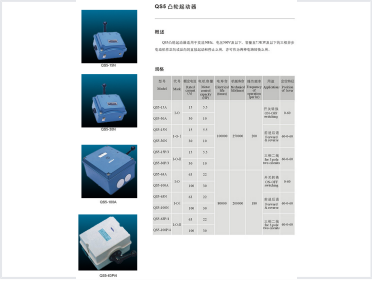

QS5 占轮起动器

概述

QS5占轮起动器是用于三相异步电机，电压380V及以下，容量在7.5KW以内的电机直接启动和停止的电器，可以用于电机的正反转运行。

规格

型号 Model	型号 Model	额定电压 Rated voltage	额定电流 Rated current	电机功率 Motor capacity	电气寿命 Electrical life	机械寿命 Mechanical life	操作频率 Frequency of operation	用途 Application	安装方式 Position of Fixed
QS5-11A	1x1	11	5.5					手动控制 (220V,380V 50/60Hz)	3-60
QS5-16A		16	7.5						
QS5-11C	1x1	11	5.5	100000	250000	300		用户自定义 (Customer Customized)	60×60
QS5-16C		16	7.5						
QS5-11B-3	1x1-3	11	5.5					三相二线 Bi-Cylinder	60×60
QS5-16B-3		16	7.5						
QS5-44A	1x2	44	22	30000	250000	200		手动控制 (220V,380V 50/60Hz)	3-60
QS5-100A		100	50						
QS5-44C	1x2	44	22					用户自定义 (Customer Customized)	60×60
QS5-100C		100	50						
QS5-44B-3	1x2-3	44	22					三相二线 Bi-Cylinder	60×60
QS5-100B-3		100	50						