


2-Pole Residual Current Circuit Breaker with Overload Protection

This 2-pole residual current circuit breaker (RCCB) provides overload protection for electrical safety. It has a test button for monthly testing, a leakage trip indicator, and a reset function.



ADDITIONAL IMAGES

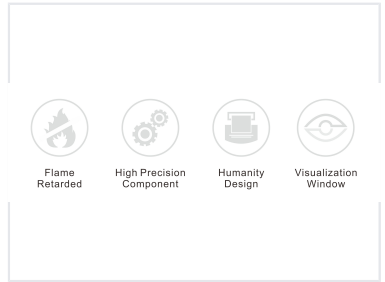

Overview

Professional Electrical Protection

This 2-pole Residual Current Circuit Breaker with Overload Protection is engineered for reliable safety in both residential and commercial electrical systems. It features advanced leakage detection with a rapid response time and utilizes high-quality, heat-resistant materials for long-term durability. Designed for ease of use, it includes integrated status indicators and a test function to ensure consistent operational safety.

Electrical Ratings

Available Rated Currents

- 6
- 10
- 16
- 20
- 25
- 32
- 40
- 50
- 63

| | |
|-------------------------|---------|
| Rated Voltage | AC 230V |
| Rated Breaking Capacity | 4500 A |

Performance

Tripping Characteristic
C32

| | |
|----------------------------|-------------|
| Residual Operating Current | 15mA - 30mA |
|----------------------------|-------------|

| | |
|---------------|---------------|
| Reaction Time | 0.03s - 0.08s |
|---------------|---------------|

Build Quality

Design Features

- Breaking indicator light
- Test button for monthly maintenance
- Visualization window
- Reset button
- Imported key components

| | |
|------------------------|---|
| Construction Materials | BMC Material, Nylon, Heat-resistant (800°C) |
|------------------------|---|

Compliance

| | |
|----------------------|---|
| Regulatory Standards | IEC60898, IEC61009, IEC60947, IEC60947-2, GB16917.1, IEC61009-1 |
|----------------------|---|