


# 2x2A Fiber Optic Switch

This 2x2A optical switch is known for its performance and low insertion loss. It is suitable for OADM, OXC, system monitoring, and protection, and can be integrated into high-density optical communication systems.

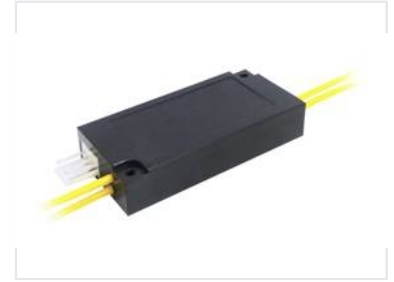

## Overview

### High-Performance Optical Switching

The 2x2A Optical Switch is a versatile component engineered for demanding optical communication environments, including OADM, OXC, and system monitoring. It features a compact, high-density design that enables seamless integration into modern networks. With a focus on reliability, the switch offers low insertion loss and excellent stability, ensuring minimal signal degradation and consistent performance.

## Key Features

### Key Features

- Low Insertion Loss
- Wide Wavelength Range
- Low Crosstalk
- High Stability and Reliability
- Epoxy-free on Optical Path
- Latching and Non-latching options

## Applications

### Common Applications

R&D Laboratory, System Monitoring, OADM, MAN

## Technical Specifications

Wavelength Range	1625 nm
Operating Wavelengths	1310 / 1490 / 1550 / 1620 nm