


2x4 LED Flat Panel 7000lm

This 2x4 LED panel meets the latest 2020 UL 8750 standard and is DLC 5.1 listed. It features 0-10V isolated dimming and is compatible with emergency backup drivers.

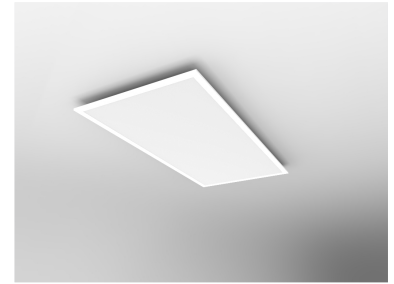

Overview

Professional LED Flat Panel

This 2x4 LED flat panel is engineered to provide uniform, high-efficacy ambient lighting for professional environments such as offices, schools, hospitals, and retail spaces. Delivering 7000 lumens, it serves as an energy-efficient replacement for traditional fluorescent troffer fixtures, offering up to 70% energy savings. Designed for versatility, it supports multiple installation methods and includes standard 0-10V dimming capabilities for optimal light control.

Performance Metrics

Luminous Flux

7000 lm

Brightness

Rated Lifespan

50000 hrs

Electrical Specifications

Input Voltage

100-277V AC

Frequency

50-60Hz

Dimming Capability

0-10V DC

Installation & Environment

Mounting Options

- Recessed (Grid Ceilings)
- Suspended (Hanging Brackets)
- Surface Mount (Requires Kit)

Operating Temperature Range

-20 to 40

Suitable Environments

Schools, Offices, Hospitals, Retail Stores