



3-Position Selector Switch with Elevator Push Button

This 3-position selector switch is designed with a black elevator push button. It is suitable for use in elevator control panels and other demanding environments, providing reliable and precise operation.

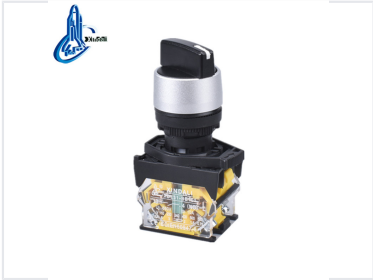

Overview

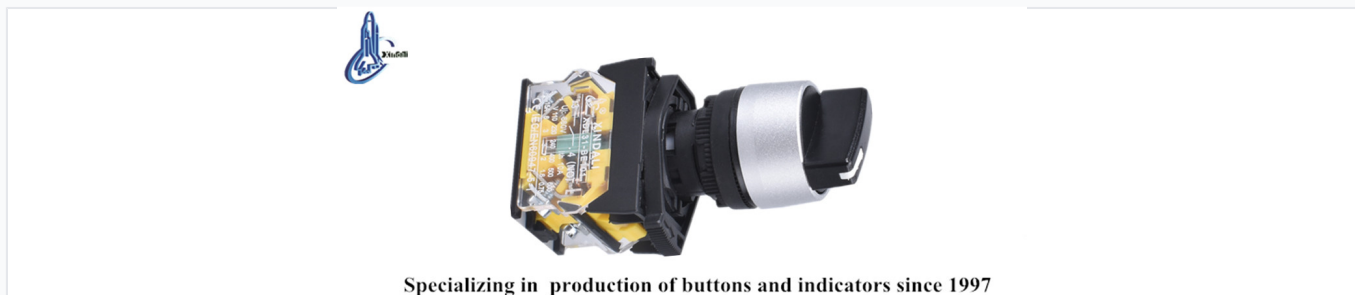

Specializing in production of buttons and indicators since 1997
Professional 3-position selector switch configured for elevator control applications.

Industrial Control Selector Switch

The XDL31-BD33 is a 3-position selector switch integrated with a 2-position black elevator push button. Designed for industrial control circuits, it operates reliably in AC voltages up to 660V. Its robust construction utilizes zinc alloy and high-grade anti-flam plastic, ensuring longevity and safety in demanding environments.

Electrical Specifications

Rated Operating Current

3 A AC-15 (240V)	3 A DC-13 (250V)
----------------------------	----------------------------

Rated Insulation Voltage (Ui) 600 V

Conventional Thermal Current (Ith) 10 A

Mechanical Performance

Mechanical Life

Component	Cycles
Push Button	3000000
Emergency Button	300000

Environmental Data

Operating Temperature -5°C to +55°C

Relative Humidity 35% - 85% RH

Compliance





Applied Standards

- IEC60947-5-1
- GB/T14048.1
- GB14048.5

Certifications

CE, ISO 9001, RoHS, UL

Installation

 XDL31-BD25	Standard Handle Selector Switch	N/O+N/O		3-position stay put	XDL31-BD33	
				3-position spring return	XDL31-BD53	
		N/O+N/C		2-position stay put	XDL31-BD25	
				2-position spring return	XDL31-BD45	

Dimensional drawing showing standard handle selector configuration and installation specs.

Protection Rating

IP40 • IP54 • IP65 • IP66 • IP67 • IP68

Mounting Hole Diameter

22 mm