


# 40A 3-Pole AC Definite Purpose Contactor

## 24-277V

This definite purpose contactor is designed for commercial HVAC, refrigeration, and resistive heating applications. The 3-pole contactor meets USA/Canada standards for electrical and mechanical requirements.

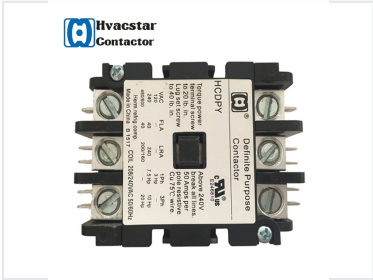

### ADDITIONAL IMAGES



### Overview

#### High-Performance Definite Purpose Contactor

This 3-pole definite purpose contactor is engineered for reliable performance in demanding HVAC and refrigeration applications. Designed to handle both resistive and inductive loads, it ensures seamless control for compressors, motors, and heating elements. Built with high-quality materials, this contactor offers robust durability and consistent operation in varied electrical environments.

### Electrical Ratings

#### Rated Current (FLA)

**40 A**

Full Load Amps

**50 A**

Resistive Load (per pole)

#### Coil Voltage

208/240VAC 50/60Hz

#### Operating Voltage Range

24-277V

### Performance

#### Horsepower Ratings

Configuration	Voltage	Rating
1-Phase	240V	3 HP
3-Phase	240V	7.5 HP
3-Phase	480/600V	15 HP

## Installation

### Torque Specifications

- Terminal Screw: 20 lb. in.
- Lug Set Screw: 40 lb. in.

### Wire Compatibility

Copper (Cu) 75°C wire

## Compliance & Services

### Service & Customization

OEM Available, ODM Available, 100% Self-Inspection, Quality Guarantee