



## 43-65" Floor Standing Digital Signage


This floor-standing digital LCD signage is available in sizes ranging from 43 to 65 inches. It features a metal case with a slim design and tempered glass for safety.

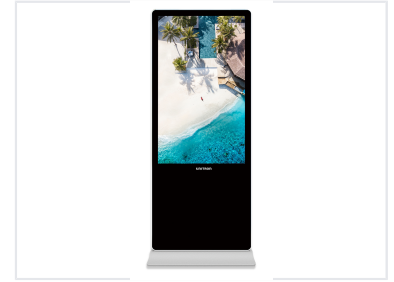

### ADDITIONAL IMAGES

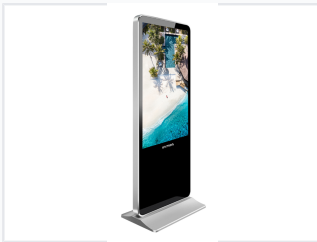

### Overview



Versatile LED/LCD advertising player available in 43, 55, and 65-inch models for indoor environments.

### Versatile Floor Standing Digital Signage

This premium floor-standing digital LCD signage is designed to enhance brand visibility in high-traffic indoor environments. Available in sizes ranging from 43" to 65", it features a sleek metal case protected by tempered glass for maximum durability and safety. With support for both Android and Windows operating systems, plus optional IR touch functionality, it provides a flexible platform for interactive advertisements and multimedia content.

## Display Performance

### Key Display Metrics

**1080 p**

Resolution

**350 cd/m2**

Standard Brightness

**8 ms**

Response Time

### Panel Specifications

Feature	Specification
Viewing Angle	89/89/89/89
Aspect Ratio	16:9
Color Depth	16.7M
Surface Protection	Tempered Glass

## System & Connectivity

### Interface & Connectivity

- WiFi & Wired Network (RJ45)
- USB Input
- HDMI Input
- SD/TF Card Slot
- DC Input

### Operating Systems

Android, Windows

## Model Comparison

### Model Dimensions & Weight

Model	Screen Size	Machine Size (mm)	Net Weight
LED430G218	43 inch	1800*620*80	47 kgs
LED500G218	50 inch	1856*698*80	59 kgs
LED550G218	55 inch	1915*770*80	68 kgs
LED650G218	65 inch	2063*894*80	85 kgs

## Functional Features

### Playback & Management

- Auto play on power-on
- Timer on/off & Preset time play
- Rolling words/scrolling text
- Loop playback & Slide show
- Power-off memory (continuous play)
- Security lock for content protection
- USB auto-update to SD card

### Supported Formats

Type	Formats
Video	MPG, MPEG-1/2/4, AVI, MKV, FLV, TS, VOB
Audio	MP3, WMV
Photo	JPEG, BMP

## Physical & Environmental

### Compliance

CE • FCC • RoHS

### Construction

Slim design metal case with tempered glass

### Operating Temperature

0°C to 40°C