


440W-500W Monocrystalline Solar Panel

This standard 440W-500W 32V solar panel provides a 48Vdc output for charging 36V batteries. It is assembled with front tempered glass, a TPT backsheet, and an aluminum frame for strength and weather resistance.

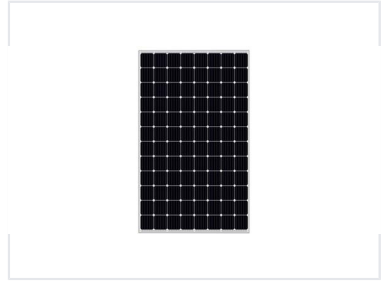

Overview

High-Efficiency Solar Solution

This monocrystalline solar panel is engineered for high-performance renewable energy generation. With a versatile power output range of 440W to 500W, it is suitable for a wide variety of residential, commercial, and industrial installations. Its advanced 96-cell design ensures reliable and sustainable energy production for diverse project requirements.

Electrical Characteristics

Power Output Range

440 W

Minimum Power

500 W

Maximum Power

Mechanical Characteristics

Cell Count	96 cells
Cell Technology	Monocrystalline

Applications

Suitable Applications	Residential, Commercial, Industrial
-----------------------	-------------------------------------