

63A 3-Pole Molded Case Circuit Breaker (MCCB)

This is a compact, high-performance molded case circuit breaker (MCCB) with a 63A current rating and 3 poles. It is designed for reliable circuit protection in electrical power transmission and distribution systems.



ADDITIONAL IMAGES



Product Overview

High-Performance Molded Case Circuit Breaker

The TRM series molded case circuit breaker provides reliable overload and short-circuit protection for electrical distribution systems. Engineered for high performance in a compact footprint, this 3-pole MCCB supports versatile industrial and commercial applications. It complies with international IEC/EN 60947-2 standards, ensuring durability and safety across a wide range of operational environments.

Technical Data

Rated Current (In)

- 15
- 20
- 30
- 40
- 50
- 63

Short-Circuit Breaking Capacity (Icu)

Voltage	S-Type (kA)	H-Type (kA)
240V	14	25
415V	5	7.5

Mechanical Life

8500 cycles

Mechanical

1500 cycles

Electrical

Rated Operational Voltage (Ue)

240/415

Rated Insulation Voltage (Ui)

1000 V

Rated Impulse Withstand Voltage (Uimp)

8 kV

Environment and Standards

Ambient Temperature

-5°C to +55°C

Certifications


IEC/EN 60947-1, IEC/EN 60947-2

Physical Properties

Dimensions (3-Pole)

100 x 75 x 60 mm

Accessories

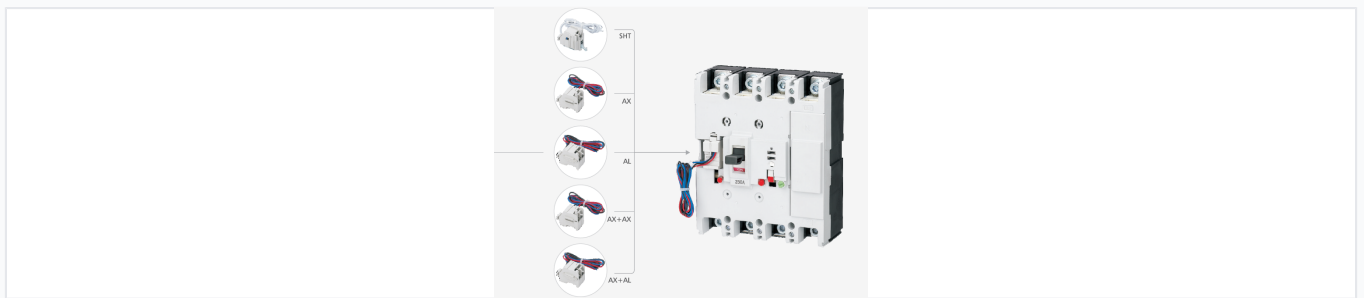

Supports integrated auxiliary and alarm contacts for enhanced monitoring.

Integrated Accessory Support

Shunt Trip (SHT) • Auxiliary Contact (AX) • Alarm Contact (AL)