


Auto Darkening Welding Filter

This auto darkening welding filter is solar-powered and automatically darkens upon arc initiation. It has adjustable sensitivity and delay settings and conforms to CAN/CSA Z94.3, ANSI Z87.1, and EN379 standards.



ADDITIONAL IMAGES

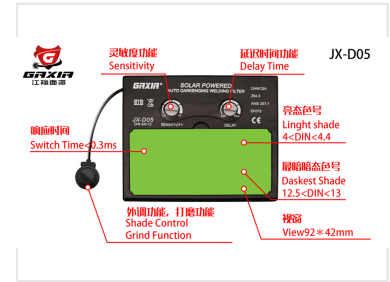

Overview

Professional Auto-Darkening Welding Filter

This solar-powered auto-darkening welding filter is engineered for optimal eye protection and visibility during welding operations. Featuring adjustable sensitivity and delay settings, it allows users to customize response times to specific welding conditions. Built with high-quality materials and dual high-sensitivity sensors, it ensures reliable performance and safety across various applications.

Technical Specifications

Viewing Area	92 x 42 mm
Switch Time	0.3 ms
DIN Shade Range	4/9-13
Light Shade Level	4 < DIN < 4.4
Darkest Shade Level	12.5 < DIN < 13
Power Source	Solar Powered
Number of Sensors	2

Features & Compliance

Key Features

- Adjustable Sensitivity
- Adjustable Delay Time
- Grind Function
- Shade Control

Compliance Standards	CAN/CSA Z94.3, ANSI Z87.1, EN379, CE
----------------------	--------------------------------------