


# Bottle Label Shrink Sleeve Applicator

This machine is designed for applying shrink labels to bottles. It utilizes a heat tunnel to tightly shrink the labels, providing a secure and professional finish.

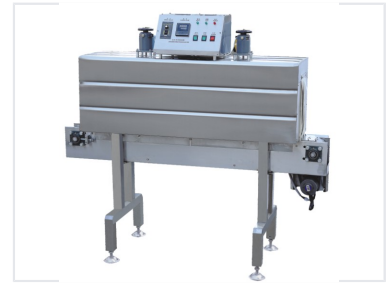

## Overview

### Professional Shrink Sleeve Application

This high-efficiency shrink sleeve applicator is designed to apply PVC labels securely to bottle bodies using precise, uniform heat distribution. Featuring a double-fan structure and intelligent temperature control, it ensures a tight, professional finish for various packaging needs. The machine offers stepless speed regulation and a smooth steel plate conveyor, making it a reliable solution for food, beverage, pharmaceutical, and cosmetic production lines.

## Key Metrics

### Max Tunnel Temperature

**300**

Max Temperature

### Power Consumption

**9 kw**

Power

## Technical Specifications

|                         |                     |
|-------------------------|---------------------|
| Electrical Requirements | 220V/380V 50Hz      |
| Tunnel Dimensions       | 1200 x 140 x 350 mm |
| Maximum Pack Size       | 120 x 330 mm        |

## Performance

|                          |            |
|--------------------------|------------|
| Conveyor Speed           | 0-10 m/min |
| Conveyor Height          | 900 mm     |
| Conveyor Weight Capacity | 10 kg      |

## Physical Dimensions

|                    |                      |
|--------------------|----------------------|
| Machine Dimensions | 3500 x 340 x 1630 mm |
| Machine Weight     | 150 kg               |

## Features

### System Highlights

Double Fan Structure, Intelligent Temperature Control, Stepless Speed Regulation, Steel Plate Conveyor