



Brush Cutter Flexible Shaft Assembly

This flexible shaft assembly is designed for brush cutters. It ensures efficient power transmission and smooth operation for demanding agricultural applications.

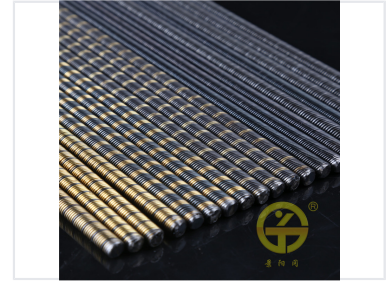

ADDITIONAL IMAGES



Product Overview

High-Performance Flexible Shaft Assembly

This flexible shaft assembly is a critical spare part designed for brush cutters, engineered for high transmission torque and strong fatigue resistance. Constructed with a robust NBR rubber hose and a high-strength inner shaft, it ensures reliable power delivery and protection during high-speed rotation. The design supports quick plugging for easy installation and maintenance, making it an ideal solution for demanding agricultural and landscaping machinery.

Technical Specifications

Available Shaft Diameters

- 6
- 8
- 9

Performance Key Metrics

1 High

Torque Transmission

1 Strong

Fatigue Resistance

Hose Composition

65 Manganese Steel Strip, Steel Wire Braid, NBR Rubber

Hose Diameter

22 mm

Customization & Compatibility

Customization Options

Bending Diameters • Color Options • Assembly Joints

Installation Features

Supports quick plugging for easy installation and maintenance