


Carbide Tipped Hammer Drill Bit

Carbide tipped hammer drill bits feature double flutes and WS-Plus shanks. They are manufactured using rolled and milled processes and surface treated with sand-blast, galvanization, and chrome plating.

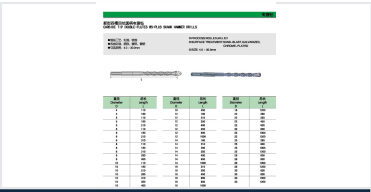

Product Overview

High-Performance Hammer Drill Bits

These carbide-tipped hammer drill bits are engineered for professional construction and masonry applications. Featuring a robust WS-Plus shank and double-flute design, they offer efficient debris removal and consistent drilling performance. Manufactured through advanced rolling and milling processes, these bits are surface treated for enhanced durability and longevity.

Technical Specifications

Surface Treatment

Sand-blast • Galvanized • Chrome-plated

Manufacturing Process

Roller, Milled

Shank Type

WS-Plus

Available Diameter Range

4 mm

Maximum Diameter

30 mm

Dimension Table

Standard Sizes

Diameter (mm)	Length (mm)
4	110
4	160
5	110
5	160
5	210
6	110
6	160
6	210
8	110
8	160
8	210
8	260
8	450
10	110
10	160
10	210
10	260
10	310
10	350
10	400
10	450
12	160
12	210
12	250
12	400
12	450
12	800
12	1000
14	160
14	210
14	260
14	250
14	400
14	450
14	1000
16	210
16	350
16	450
16	600
16	800
16	1000
16	1200
22	260
22	250
22	450
22	600
22	800
22	1000
22	1200
25	260
25	800
25	1000
25	1200
28	600
28	800
28	1000
28	1200
30	600
30	800
30	1000
30	1200