


Category 5 Unshielded Twisted Pair Cable

This communication cable exceeds ANSI/TIA/EIA-568B.2 standards. Its small outer diameter reduces twisting during installation, making it suitable for horizontal subsystem connections.

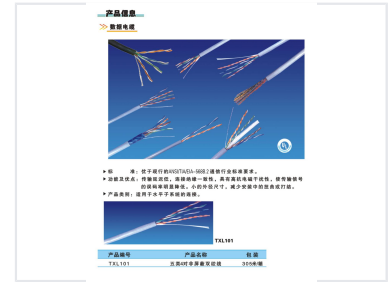

Overview

High-Performance Category 5 Cabling

This Category 5 Unshielded Twisted Pair (UTP) cable is engineered to exceed ANSI/TIA/EIA-568B.2 standards, ensuring reliable communication performance. Designed with a focus on signal integrity, it features low transmission delay and high electromagnetic interference resistance to significantly reduce signal error rates. The cable's optimized small outer diameter facilitates easier installation by minimizing twisting and kinking, making it an ideal choice for horizontal subsystem connections.

Technical Specifications

Compliance Standards

ANSI/TIA/EIA-568B.2

Cable Type	Category 5 (Cat 5) Unshielded Twisted Pair
Pair Count	4
Primary Application	Horizontal subsystem connections

Logistics & Packaging

Product Code	TXL101
Packaging Length	305 m
Packaging Unit	Box

Key Features

Performance Highlights

- Low transmission delay
- Consistent insulation
- High electromagnetic interference resistance
- Reduced outer diameter for easy installation