


Combined Wiring Terminal Block 32A 500V

This combined wiring terminal block is designed for secure and efficient electrical connections. It features a robust construction suitable for industrial environments, with a rated current of 32A and voltage of 500V.

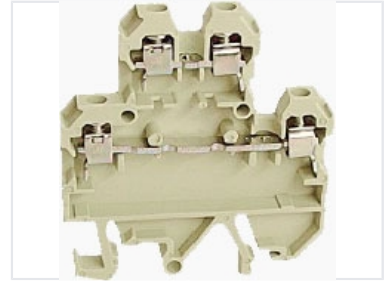

Product Overview

Professional Combined Wiring Terminal Block

The Combined Wiring Terminal Block provides a secure and efficient solution for electrical circuit organization in industrial environments. Featuring a modular design with 32A/500V capacity, this unit is engineered for reliable performance and easy configuration. It is constructed from flame-retardant materials to ensure safety and durability in demanding applications.

Electrical Specifications

Performance Metrics

32 A

Rated Current

500 V

Rated Voltage

4 mm²

Max Conductor Cross Section

Technical Details

Mounting and Screw Specs

Parameter	Specification
Screw Type	M3
Tightening Torque	0.5 - 1.0 Nm
Compatible Rails	NS-35/7.5 or NS-35/15

Dimensions (H x W x T)	60mm x 54mm x 6mm
------------------------	-------------------

Compliance and Materials

Flame Retardant Rating

UL94V0-V2

Certifications	IEC947-7-1, CQC, CE, ROHS
----------------	---------------------------

Insulation Material	PA66
---------------------	------