


# Double Row Ball Slewing Bearing with Dissimilar Diameters

This double row ball slewing bearing features three seats. Two rows of steel balls with different diameters are fitted according to the load.



## ADDITIONAL IMAGES

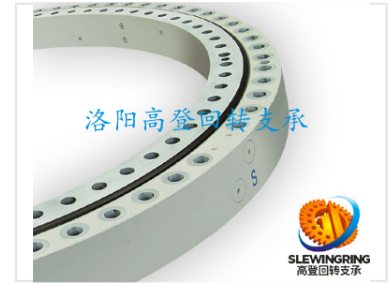

## Product Overview

### High-Capacity Slewing Solution

The double row ball slewing bearing with dissimilar diameters is engineered with a robust three-seat structure, featuring two rows of steel balls of varying sizes to optimize load distribution. With 90-degree load angles on both upper and lower races, this bearing is capable of supporting significant axial forces. Its sturdy construction and large dimensions make it an ideal choice for heavy-duty machinery, particularly tower cranes and mobile unloading equipment.

## Technical Specifications

<b>Bearing Type</b>	Double Row Ball Slewing Bearing (Dissimilar Diameters)
<b>Load Angle</b>	90 degrees
<b>Key Features</b>	Three-seat structure, Dissimilar ball diameters, High axial load capacity, Open mode fitting

## Applications

### Common Applications

- Tower cranes
- Mobile cranes
- Unloading machinery
- Heavy-duty industrial equipment