

Electric Scooter for Adult Commuting

This two-wheeled electric scooter is designed for adult use. It offers energy-efficient and environmentally conscious transportation for urban commutes.



ADDITIONAL IMAGES



Product Overview



Showcase of the scooter model in an exhibition setting.

Efficient Urban Commuting

This electric scooter is designed with a focus on modern aesthetics and practical urban mobility. It combines a powerful motor with reliable suspension and braking systems to ensure a smooth, safe, and comfortable ride for adult commuters. With its energy-efficient design and compact form factor, it offers an environmentally friendly and convenient solution for short-distance travel.

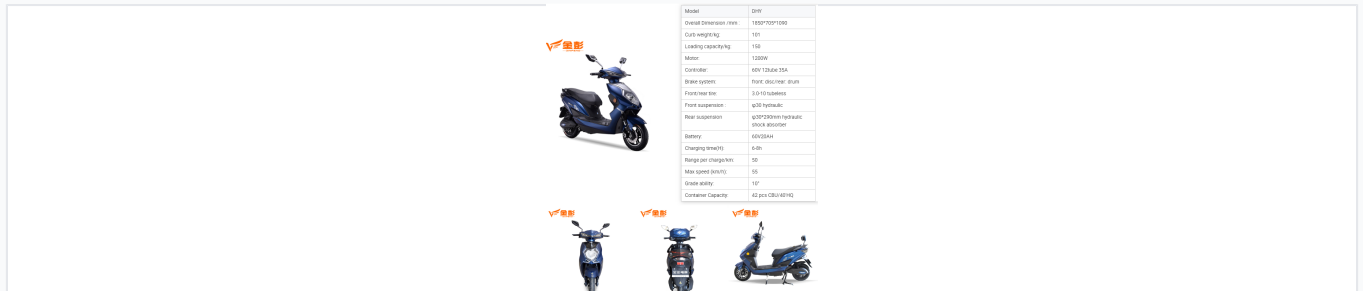
Performance

Motor Power	1200 W
Maximum Speed	55 km/h
Range per Charge	50 km
Grade Ability	10 °

Battery & Controller

Battery Specification	60V 20AH
Charging Time	6-8 hours
Controller	60V 12tube 35A

Technical Specifications

	<table><tr><td>Model</td><td>D99</td></tr><tr><td>Overall Dimension (mm)</td><td>1850*705*1090</td></tr><tr><td>Curb weight(kg)</td><td>101</td></tr><tr><td>Loading capacity(kg)</td><td>150</td></tr><tr><td>Motor</td><td>1200W</td></tr><tr><td>Controller</td><td>60V 12tube 35A</td></tr><tr><td>Brake system</td><td>Front disc/rear drum</td></tr><tr><td>Front wheel size</td><td>12.5" tubeless</td></tr><tr><td>Front suspension</td><td>40mm Hydraulic</td></tr><tr><td>Rear suspension</td><td>40*230mm Hydraulic Shock Absorber</td></tr><tr><td>Battery</td><td>60V20AH</td></tr><tr><td>Charging time(h)</td><td>6-8h</td></tr><tr><td>Range per charge(km)</td><td>35</td></tr><tr><td>Max speed (km/h)</td><td>35</td></tr><tr><td>Grade ability</td><td>10°</td></tr><tr><td>Container Capacity</td><td>42 pcs CBU/40'HQ</td></tr></table>	Model	D99	Overall Dimension (mm)	1850*705*1090	Curb weight(kg)	101	Loading capacity(kg)	150	Motor	1200W	Controller	60V 12tube 35A	Brake system	Front disc/rear drum	Front wheel size	12.5" tubeless	Front suspension	40mm Hydraulic	Rear suspension	40*230mm Hydraulic Shock Absorber	Battery	60V20AH	Charging time(h)	6-8h	Range per charge(km)	35	Max speed (km/h)	35	Grade ability	10°	Container Capacity	42 pcs CBU/40'HQ
Model	D99																																
Overall Dimension (mm)	1850*705*1090																																
Curb weight(kg)	101																																
Loading capacity(kg)	150																																
Motor	1200W																																
Controller	60V 12tube 35A																																
Brake system	Front disc/rear drum																																
Front wheel size	12.5" tubeless																																
Front suspension	40mm Hydraulic																																
Rear suspension	40*230mm Hydraulic Shock Absorber																																
Battery	60V20AH																																
Charging time(h)	6-8h																																
Range per charge(km)	35																																
Max speed (km/h)	35																																
Grade ability	10°																																
Container Capacity	42 pcs CBU/40'HQ																																

Technical specifications overview including motor, battery, and dimensions.

Suspension

- Front: AE30 Hydraulic
- Rear: AE30*290mm Hydraulic Shock Absorber

Braking System	Front Disc, Rear Drum
Tire Type	3.0-10 Tubeless

Physical Dimensions

Dimensions (L*W*H)	1850*705*1090 mm
Curb Weight	101 kg
Loading Capacity	150 kg

Logistics

Container Capacity	42 pcs CBU/40'HQ
--------------------	------------------