


Emergency and Security Lighting Unit with Fluorescent Tubes

This emergency lighting unit provides reliable illumination with its fluorescent tubes and transparent protective casing. It features an integrated control panel with indicator lights and a central button.

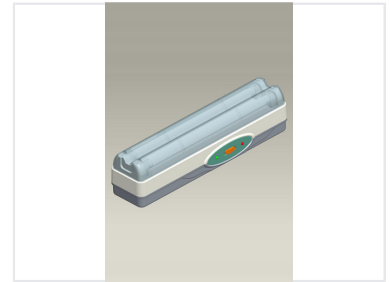

Product Overview

Versatile Emergency Security Lighting

The TK-2292 is a reliable emergency lighting solution designed to provide automatic illumination during power outages. Featuring dual fluorescent tubes and a 229-degree viewing angle, it ensures broad visibility for security and safety applications. Its portable design, including a carry handle and wall-mounting capabilities, makes it an ideal choice for diverse industrial or commercial environments.

Technical Specifications

Battery Capacity

6 V

Voltage

4 Ah

Capacity

Indicator Lights

- Green LED: Operate Indicator
- Red LED: Charge Indicator

Light Source

2 x 8W Fluorescent Tubes (12 inch)

Protection Features

Overdischarge Protection, Overcharge Protection

Physical Attributes

Mounting Options

Handle • Wall Mount • Stand

Viewing Angle

229 degree

Logistics

Packaging and Logistics

Metric	Value
Carton Quantity	10 pcs/ctn
Carton Dimensions	46.5 x 38.5 x 19cm
Net Weight (Carton)	15.5 kg
Gross Weight (Carton)	16.5 kg
20ft Container Load	8,700 pcs