


High Density Fiber Optic MPO Patch Panel

This MPO patch panel is constructed from high-quality cold-rolled steel for durability. Its modular, rail-type drawing structure allows for easy installation and maintenance, supporting up to 144 cores (LC) in a 1U space.

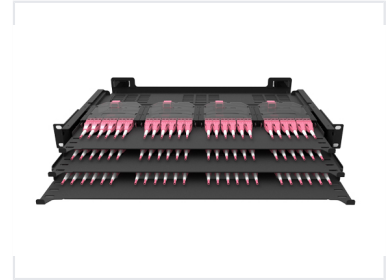

Product Overview

High-Density MPO Patch Panel

This high-density MPO patch panel is engineered for efficient fiber optic cable management in demanding data center and telecommunication environments. Featuring a robust sliding tray design, it allows for convenient access and simplified maintenance of fiber connections. Constructed from durable cold-rolled steel, this panel ensures long-lasting reliability and optimal signal integrity for high-bandwidth applications.

Physical Specifications

Dimensions

Rack Unit	Dimensions (HxWxD)
1U	1U x 482 x 385 mm
2U	2U x 482 x 385 mm

Material	Cold rolled steel plate
Finish Color	Black
Installation Width	19 inch

Environmental Conditions

Operating Temperature

-10 °C Min Operating Temp	60 °C Max Operating Temp
-------------------------------------	------------------------------------

Storage Temperature	-40 °C ~ 68 °C
Relative Humidity	10% ~ 90%

Compliance & Usage

Standards	ISO/IEC11801
Usage Environment	Indoor