


Illuminated Push Button Switch with LED Indicator


This illuminated push button switch provides clear visual signaling with its integrated LED indicator. It is suitable for use in control panels and machinery requiring reliable switching.



ADDITIONAL IMAGES

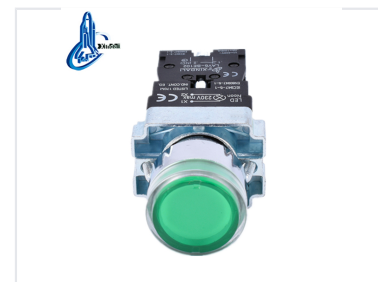

Overview

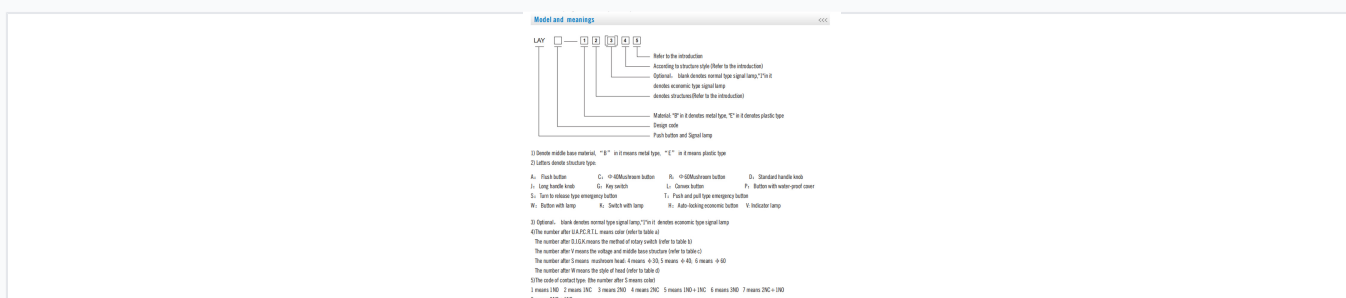

Model naming convention and structural breakdown.

Industrial Illuminated Push Button

This illuminated push button switch is designed for reliable control in industrial environments, suitable for circuits up to 660V AC or 400V DC. Constructed with a durable zinc alloy and anti-flame plastic body, it features high-grade silver alloy contacts for superior electrical erosion resistance. The integrated LED indicator provides clear visual status signaling, making it an ideal choice for control panels, machinery, and warning systems.

Technical Specifications

Rated Insulation Voltage	600 V
Conventional Heating Current	10 A
Insulation Resistance	e5MΩ
Contact Resistance	d25mΩ
Power Frequency Withstand Voltage	AC 2.5KV/min
LED Brightness	60 cd/m ²

Performance Metrics

Mechanical Life

1000000 cycles

Pushbutton

500000 cycles

Selector Switch

Electrical Life

5000000 cycles

Pushbutton

250000 cycles

Selector Switch

Compliance & Standards

Certifications

CE • ISO 9001 • RoHS • UL Listed

Compliance Standards

GB/T14048.1, IEC60947-5-1, EN60947-5-1

Physical Dimensions



LAY5-BW3371


Illuminated
Flush push button
Spring return 220~240V

N/O

N/C



- White LAY5-BW3171
- Green LAY5-BW3371
- Yellow LAY5-BW3571
- Blue LAY5-BW3671
- Red LAY5-BW3472



Dimensional drawing and wiring configuration.

Mounting Dimensions

Parameter	Value
Mounting Thread	M22
Diameter	29mm
Max Panel Thickness	7mm
Total Height	61mm