









Technical Specifications

 <p>Long handle Selector Switch</p> <p>LAY4-BJ45</p>	N/O		3	2-position stay put	LAY4-BJ21		
			4	2-position spring return	LAY4-BJ41		
	N/O+N/C		3	1	2-position stay put		LAY4-BJ25
			4	2	2-position spring return		LAY4-BJ45
	N/O+N/O		3	13	3-position stay put		LAY4-BJ33
			4	14	3-position spring return		LAY4-BJ53

Configuration options for long handle selector switches, including stay-put and spring-return variants.

Electrical Ratings

660 V

Max AC Voltage

400 V

Max DC Voltage

10 A

Heating Current

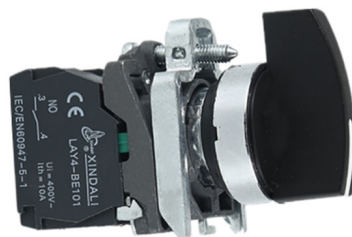
Performance Metrics

Parameter	Value
Insulation Resistance	e5M©
Contact Resistance	d2m©
Withstand Voltage	AC 2.5KV/min
Voltage Wave Tolerance	±20%

Operational Life

- Mechanical Life (Pushbutton): 1,000,000 cycles
- Mechanical Life (Selector): 500,000 cycles
- Electrical Life (Pushbutton): 5,000,000 cycles
- Electrical Life (Selector): 250,000 cycles
- Indicator Lamp Life: 100,000 hours

Construction



Specializing in production of buttons and indicators since 1997

Robust construction featuring a metallic mounting frame and clearly marked contact terminals.

Material Composition

Zinc Alloy Body • Anti-flame Plastic • Silver Alloy Contacts