

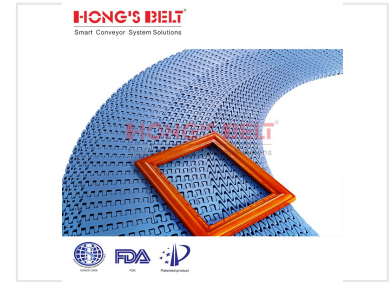


# Modular Plastic Conveyor Belt, 31.75mm Pitch

This modular plastic conveyor belt has a 31.75mm pitch and a 12.5mm thickness. It is constructed from FDA-approved materials and is suitable for use in food processing applications.



## ADDITIONAL IMAGES



## Overview

### High-Performance Modular Conveyor Solution

This modular plastic conveyor belt is engineered for versatility and durability in demanding industrial environments. Featuring a 31.75mm pitch and an open-area design, it facilitates efficient cleaning and sanitation, making it an ideal choice for food processing and non-food material handling applications. The belt is built to withstand extreme temperatures ranging from -40°C to 260°C and offers a robust load capacity of up to 1.2 tons per square meter.

## Technical Specifications

Pitch	31.75 mm
Thickness	12.5 mm
Rod Diameter	4.9 mm
Minimum Width	423 mm
Open Area	36%
Working Temperature	-40°C to 260°C
Max Load Capacity	1.2 tons/sqm

## Features

### Compliance

FDA Approved • EU Approved

### Available Materials

- PP
- POM
- PE
- PA

### Color Options

- White
- Blue
- Gray
- Nature
- Dark-brown

### Design Features

Curve Capable, Maintenance Free, Easy to Clean, Water Floating

## Compatibility

### Compatible Sprocket Sizes

10T, 13T, 16T

## Applications

### Food Industry Applications

- Meat (beef & pork)
- Poultry
- Sea Food
- Bakery
- Snack Food
- Fruit & Vegetables

### Non-Food Industry Applications

- Automotive
- Tire Manufacturing
- Packaging
- Printing/Paper
- Postal
- Corrugated Cardboard
- Can Manufacturing
- PET Manufacturing
- Textile