


# Non-Sparking Open End Wrench

This non-sparking wrench is designed for use in environments where sparks could ignite flammable materials. Constructed from a copper alloy, the wrench features two different sized openings for use with various fasteners.



## ADDITIONAL IMAGES

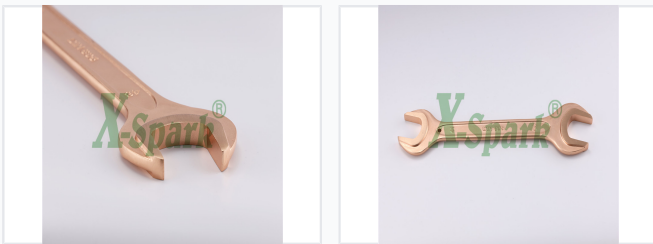

## Product Overview

### Safety-First Engineering

This non-sparking open end wrench is engineered specifically for use in hazardous, potentially explosive environments where safety is critical. Constructed from a specialized copper alloy, the tool effectively minimizes the risk of ignition from sparks near flammable liquids, vapors, or dust. It is an essential tool for professionals operating within the oil, gas, and chemical industries.

## Technical Standards

Compliance Standards	DIN 895
Material	Copper Alloy

## Key Features

### Design Benefits

- Non-sparking construction
- Corrosion resistant
- Double open-end design for versatility
- Easy access for tight spaces

Primary Function	Tightening and loosening bolts and nuts
Manufacturing Process	Die forged