


Non-Sparking Universal Bung Wrench

This non-sparking universal bung wrench is designed for opening and closing oil drums and barrels. It is constructed from a specialized alloy to prevent sparks in hazardous environments.

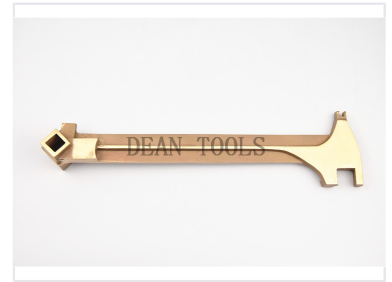

Product Overview

Safety-First Design

This universal bung wrench is specifically engineered for hazardous environments where spark prevention is critical. Constructed from specialized copper alloys, it ensures safe operation when opening or closing oil drums and barrels. Its versatile design is suitable for use across the petroleum, chemical, mining, and power generation industries.

Technical Specifications

Material Performance

Material	Hardness	Tensile Strength
Aluminum-Bronze	25 HRC	75-85 kgf/mm
Beryllium-Bronze	35 HRC	105-120 kgf/mm

Available Colors

Natural • Green

Material Composition

Aluminum Copper, Beryllium Copper

Overall Length

385 mm

Compliance & Quality

Key Features

- Non-sparking alloy construction
- High durability for long service life
- Professional-grade safety standard

Certifications

ISO 9001, UKAS

Application

Primary Industries

Petroleum, Chemical, Power Generation, Railroad, Mining