



Perforated Top Modular Plastic Conveyor Belt

This modular plastic conveyor belt features a perforated top for drainage and airflow. It is suitable for food processing applications such as washing lines.

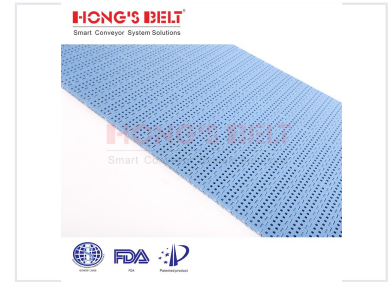

ADDITIONAL IMAGES



Product Overview

High-Performance Modular Conveyor Belt

Designed for demanding industrial environments, this perforated top modular plastic conveyor belt offers exceptional durability and hygiene. Its specialized design facilitates efficient drainage and airflow, making it an ideal choice for washing, cooling, and defrosting processes in the food industry. With a robust load capacity of up to 1.2 tons per square meter and a maintenance-free design, this belt ensures consistent performance and reduced operational downtime.

Technical Specifications

Maximum Load Capacity

1.2 tons/sqm
Max Load

Pitch	25.4 mm
Thickness	10 mm
Minimum Width	45 mm
Open Area	15 %
Rod Diameter	4.9 mm
Working Temperature	-40°C to 260°C

Design & Compatibility

Sprocket Sizes

- 7T
- 8T
- 10T
- 12T
- 16T
- 20T

Key Features

Flight Available • Side Guard Available • Food Approved Materials • Maintenance Free • Easy to Clean

Available Materials

PP, POM, PE, PA

Available Colors

White, Blue, Gray, Nature, Dark-brown

Compliance & Application

Industry Applications

Sector	Industries
Food Industry	Meat, Poultry, Sea Food, Bakery, Snack Food, Fruit & Vegetables
Non-food Industry	Automotive, Tire, Packaging, Printing, Postal, Cardboard, Can, PET, Textile

Certifications

FDA, EU