


PVC Double Pipe Extrusion Line (16-63mm)

This PVC double pipe extrusion line includes a conical twin screw extruder, vacuum forming table, haul-off unit, cutter, and stacker. It is designed for efficient production of PVC/UPVC pipes ranging from 16-63mm.



Overview

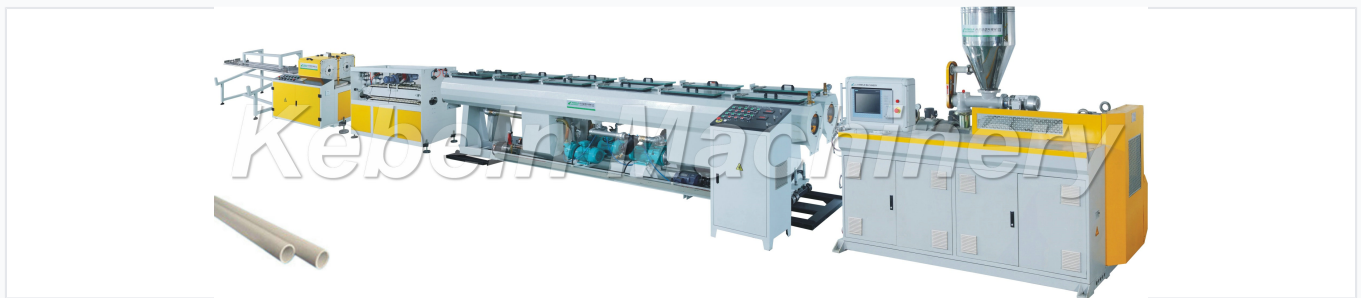

A comprehensive view of the high-performance extrusion line layout.

High-Efficiency PVC Pipe Extrusion Line

This double pipe extrusion line is engineered for high-output, simultaneous production of PVC/UPVC pipes ranging from 16mm to 63mm. The system features advanced automated controls, including high-precision temperature management and efficient material extrusion, ensuring consistent pipe quality and dimensional accuracy. Designed for durability and ease of operation, this automated production line includes a complete setup from the extruder and vacuum forming table to the haul-off, cutter, and stacker units.

Technical Specifications

Technical Comparison Table

| Model | Pipe Range (mm) | Capacity (kg/h) | Motor Power (kw) | Total Power (kw) |
|-------------|-----------------|-----------------|------------------|------------------|
| KBLD-40PVC | 16-40 | 180 | 22 | 75 |
| KBLD-63PVC | 16-63 | 300 | 37 | 95 |
| KBLD-110PVC | 50-110 | 600 | 75 | 145 |

Key Features



Precision control interface for the production line.

Key Features

- Automated fault alarm system
- High degree of process automation
- Includes conical twin-screw extruder
- Advanced temperature control integration
- Complete turnkey system configuration

Business Information

Trade Terms

T/T Payment, FOB Shunde, 1 Set MOQ

Certifications

Certifications

SGS Certified • ISO9001:2000