


Semi-Automatic Swing Arm Tire Changer

This semi-automatic tire changer is designed for efficient and safe tire removal and installation. It features a swing arm for lateral movement and a robust clamping system to secure wheels during operation.

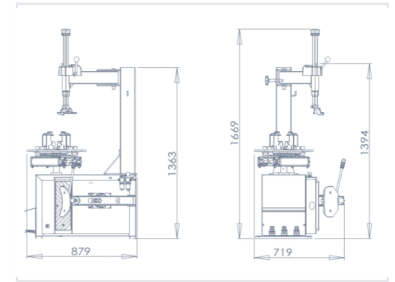

ADDITIONAL IMAGES

外夹轮胎	Rim clamping from outside	10"-19"
内撑轮胎	Rim clamping from inside	12"-21"
最大轮径	Max. Wheel Diameter	960mm
最大轮宽	Tire width	3"-15"
工作压力	Working pressure	8-10bar
电源	Voltage	380v/220v/110v
电机功率	Power	0.75kw/1.1kw



Product Overview

Professional Semi-Automatic Tire Changer

This semi-automatic swing-arm tire changer is engineered for efficient and safe tire removal and installation in small to medium-sized workshops. It features a robust clamping system and a flexible lateral swing-arm design to handle a wide variety of wheel sizes with precision. Built for durability in professional environments, the equipment includes integrated safety mechanisms such as emergency stop and overload protection.

Technical Specifications

Outside Rim Clamping Range	10" - 19"
Inside Rim Clamping Range	12" - 21"
Maximum Wheel Diameter	960 mm
Tire Width Range	3" - 15"

Performance Metrics

Operational Performance

8 bar

Min Working Pressure

10 bar

Max Working Pressure

Power and Electrical

Motor Power Options

- 0.75 kW
- 1.1 kW

Compatible Voltages

380V, 220V, 110V

Dimensions and Construction

Machine Dimensions

Measurement Point	Value
Base Width	879mm
Base Depth	719mm
Retracted Height	1363mm
Extended Height	1669mm
Clamping Height	1394mm

Safety and Compliance

Compliance Certifications

CE • ISO • SGS