

Skid Steer Loader with 2065 lb Operating Capacity

This skid steer loader has a 2065 lb rated operating capacity and a 4143 lb tipping load. Its compact size allows for operation in small spaces, and it can be equipped with various attachments.



ADDITIONAL IMAGES




Product Overview

HT65A Skid-Steer Loader

The HT65A is a multifunctional skid-steer loader designed to bridge the gap where large engineering machinery cannot operate. Its small volume, light weight, and high maneuverability make it ideal for working inside buildings or on top of structures. Engineered for versatility, it offers high reliability and responsiveness, serving as an efficient solution for various construction site requirements.

Technical Specifications

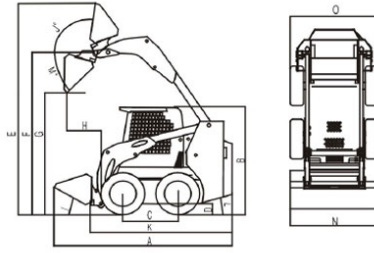

Technical diagram illustrating machine dimensions for engineering and site planning.

Performance Capacity

2065 lb

Rated Operating Capacity

4143 lb

Tipping Load

6510 lb

Operating Weight

Standard Specifications Table

Metric	Value
Rated operating capacity	2065 lb (940 kg)
Tipping load	4143 lb (1880 kg)
Operating weight	6510 lb (2950 kg)

Engine Performance

Perkins 804C-33 (63 HP / 63.9 PS)

Key Features

Control Options

- Mechanical control
- Percentage pilot control

Operational Advantages

Direct-connected gear pump, Electromagnetic hydraulic control, High responsive system, Versatile attachment compatibility