


Three-Phase Asynchronous Motor - B35 Mounting

This three-phase asynchronous motor is designed for industrial applications requiring reliable power transmission. The B35 mounting configuration combines foot and flange mounting for versatile installation.



ADDITIONAL IMAGES

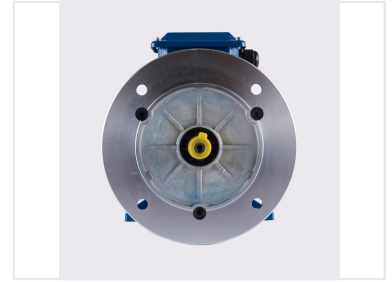

Product Overview

Industrial Three-Phase Asynchronous Motor

This GOST standard AP series three-phase asynchronous motor is engineered for reliable power conversion in diverse industrial applications. Built with high-quality 100% copper windings, it ensures efficient operation and durability under continuous duty cycles. The unit features a versatile B35 mounting configuration and adheres to rigorous international quality and safety certifications.

Certifications & Standards

Efficiency Standards

IE1 • IE2

Certifications

CCC, CE, EAC, ISO 9001:2015, GB/T 19001-2006

Performance Specifications

Key Performance Metrics

0.09 kW

Minimum Power

315 kW

Maximum Power

50 Hz

Frequency

55 IP

IP Rating

Technical Details

Supported Mounting

- B3
- B5
- B35
- B14
- B34

Available Flange Sizes

50, 56, 63, 71, 80, 90, 100, 112, 132, 160, 180, 200, 225, 250, 280, 315, 355