


# Tubular Gel Battery 2V 1500Ah

This tubular gel battery has a capacity of 2V 1500Ah, providing a reliable and long-lasting power source. It is designed for applications requiring constant voltage, such as solar systems and UPS.



## ADDITIONAL IMAGES

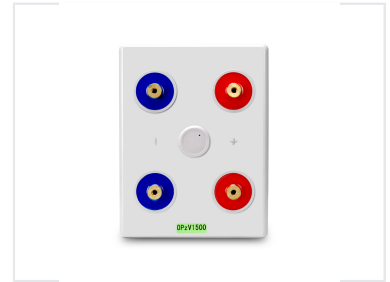

## Overview

### High-Performance Tubular Gel Battery

The OPzV series tubular gel battery is engineered for demanding energy storage applications requiring consistent, long-term reliability. With a 2V nominal voltage and a substantial 1500Ah capacity, this unit excels in solar, UPS, and critical power systems. Its robust design offers an exceptional floating design life of 20 years and superior deep discharge recovery performance, making it an ideal choice for professional-grade off-grid and backup power solutions.

## Electrical Specifications

Nominal Voltage	2 V
Rated Capacity	1500 Ah

## Performance Metrics

### Floating Design Life

**20 years**

Design Life

### Cycle Life Performance

Depth of Discharge (DOD)	Cycle Life
80%	2000
25%	6000

## Operating Conditions

Operating Temperature	-40°C to 70°C
Self-Discharge Rate	d2%per month
Storage Life	Up to 2 years at 20°C (fully charged)

## Features

### Key Advantages

- High charge acceptance performance
- Excellent deep discharge recovery
- Tubular gel technology
- Wide temperature tolerance