


# Type F Stainless Steel Camlock Quick Coupling

This stainless steel camlock fitting is suitable for use with salt water, water waste, various chemicals, hydraulic oil, and coolants. It features excellent corrosion resistance, high temperature capability, and a long life expectancy.



## ADDITIONAL IMAGES

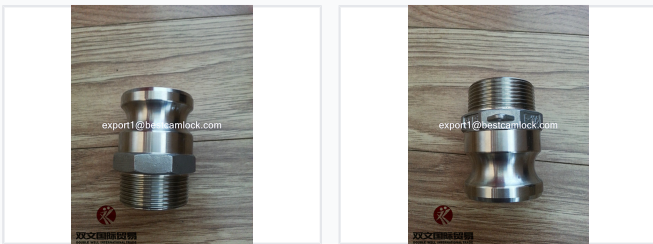

## Product Overview

### High-Performance Type F Stainless Steel Camlock

The Type F stainless steel camlock coupling is a high-quality quick connect solution designed for robust performance in industrial, agricultural, and marine fluid transfer applications. Engineered for excellent corrosion resistance and high-temperature tolerance, these fittings ensure a leak-proof and secure connection. Compatible with a variety of fluids including water, waste, and hydraulic oil, this coupling is built for long service life in demanding environments.

## Technical Specifications

### Thread Standards

- NPT
- BSPP
- BSPT

### Available Materials

Stainless Steel 304, Stainless Steel 316

### Size Range

1/2" to 8"

### Standards Compliance

A-A-59326, DIN 2828, MIL-C-27487

## Performance Metrics

### Working Pressure by Size

Size Range	Pressure (PSI)
3/4" - 2"	250
2 1/2"	225
3" - 4"	200
6"	150

### Operating Temperature

-150°F to +500°F

## Construction Details

### Seal Options

NBR • BUNA • EPDM • VITON

### Manufacturing Method

Precision casting or forged