


USA Standard Double Loop Chain

This USA standard double loop chain is designed for various machinery and industrial applications. The double loop construction enhances its strength and durability, making it suitable for demanding environments.

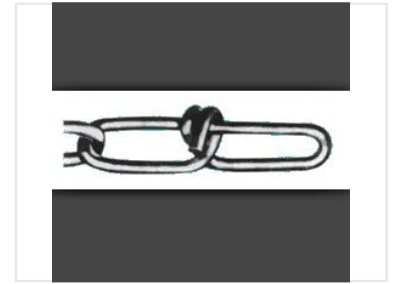

Overview

High-Strength USA Standard Double Loop Chain

This double loop chain is engineered to meet rigorous USA standards, ensuring high compatibility and reliability across various industrial applications. Its unique double loop construction significantly enhances strength and durability, making it an ideal choice for demanding environments. Designed for versatility, it excels in power transmission, lifting, and conveying systems where consistent performance and an extended service life are critical.

Technical Specifications

Size and Weight Specifications

Item No.	Diameter (mm)	Inside Length (mm)	Outside Width (mm)	Weight per 100ft (kg)
5	1.6	23.37	7	1.8
4	1.8	25.4	8	2.2
3	2	27.94	9	3
2	2.3	33.78	10	3.5
1	2.7	39.12	12	4.5
IL	2.7	51.56	12	4.2
I/O	3	45.21	14	5.7
I/OL	3	56.9	14	5.2
2/O	3.4	46.23	15.5	7.5
2/OL	3.4	56.9	15.5	7
3/O	3.8	55.12	17	9.4
4/O	4.1	55.63	19	11
6/O	4.9	73.78	21	15.7

Key Features

Standards Compliance

USA Standard

Primary Applications

Power Transmission, Lifting Systems, Conveying Systems, Industrial Machinery

Construction

Double Loop

Performance Metrics

Maximum Diameter

4.9 mm

Max Wire Diameter

Maximum Bulk Weight

15.7 kg

Weight per 100ft