



Waxed Chipboard Screw

These pozi-drive chipboard screws are designed for secure fastening in wood and composite materials. The waxed coating minimizes driving torque, ensuring smooth installation.

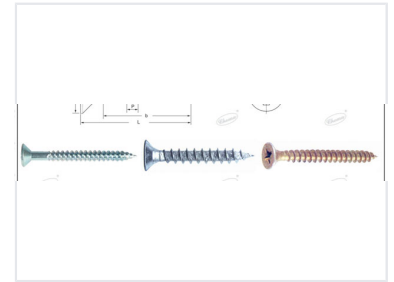

Product Overview

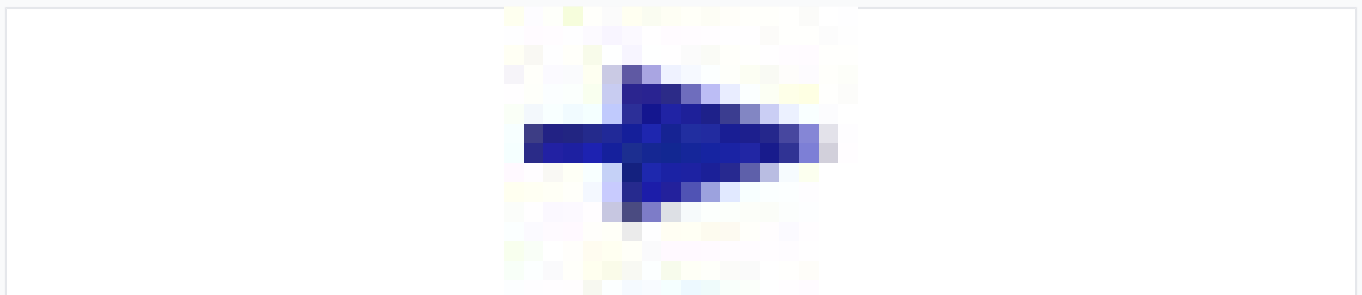

Engineered for superior torque transfer and minimized wood splitting.

High-Performance Pozi-Drive Chipboard Screws


These professional-grade chipboard screws are engineered for secure and efficient fastening in wood and composite materials. Featuring a specialized waxed coating, they significantly minimize driving torque to ensure smooth installation and reduce tool wear. The sharp point design facilitates easy starting while minimizing the risk of material splitting, making them ideal for high-precision furniture assembly and general woodworking tasks.

Material & Design

Key Features

Pozi-drive Recess, Waxed Coating, Reduced Friction, Split-resistant Tip

Technical Dimensions



d(mm)		3	3.5	4	4.5	5	6
D(mm)		6	7	8	9	10	12
P(mm)		1.35	1.6	1.8	2	2.2	2.6
K(mm)		1.95	2.3	2.6	2.95	3.25	3.8

Standard Dimensional Specifications

Diameter d (mm)	Head D (mm)	Pitch P (mm)	Height K (mm)
3	6	1.35	1.95
3.5	7	1.6	2.3
4	8	1.8	2.6
4.5	9	2.95	2.95
5	10	2.2	3.25
6	12	2.6	3.8

Thread Specifications

LENGTH L	Thread Length b (mm)						
		1.5	2.0	3.0	4.3	6.2	10.8
mm							
10		6.5					
13		9.5	9.0	8.5			
15		11.5	11.0	10.5	10.0		
17		13.5	13.0	12.5	12.0	11.5	

Thread Length (b) vs Screw Length (L)

Length L (mm)	Thread Length b (mm)
10	6.5
13	9.5
15	11.5
17	13.5