



# 3000W Modified Sine Wave Power Inverter with USB

This 3000W modified sine wave power inverter converts 12VDC to 230VAC at 50Hz. It provides a USB port with 5VDC/2A output for charging electronic devices.

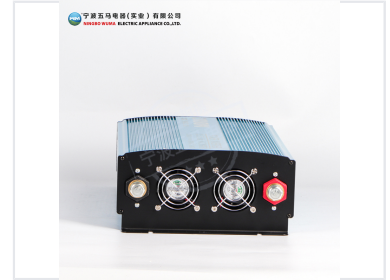

## ADDITIONAL IMAGES



## Overview

### High-Performance Power Conversion

This 3000W modified sine wave power inverter is designed to convert 12V DC battery power into reliable AC electricity for a wide range of applications. Featuring a robust 3000W continuous power output and a 6000W peak capacity, it is ideal for vehicles, boats, and off-grid power systems. Integrated cooling fans and a convenient 5V USB charging port ensure both operational stability and versatility for modern electronic devices.

## Performance Metrics

### Power Ratings

**3000 W**

Continuous Power

**6000 W**

Peak Power

**85 %**

Efficiency

## Technical Specifications

### Input & Output Details

Parameter	Value
Input Voltage	12V DC
Output Voltage	110V / 230V AC
Frequency	50Hz / 60Hz
No Load Current Draw	<1.2A

## Features

### Integrated Features

Modified Sine Wave, USB Charging Port (5V/2.0A), Dual Cooling Fans